

Lecture 10 Open Models

Open Models
Mixed Models


10.4.2002

Copyright Teemu Kerola 2002

1

Open Queuing Networks

- Easy because system throughput is already known (same as arrival rate!)
 - Forced Flow Law (FFL) and branching probs determine everything

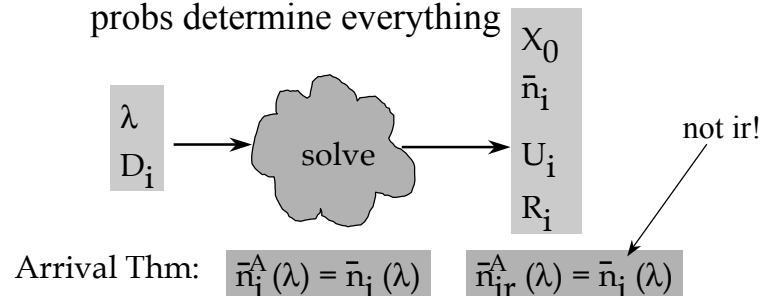

10.4.2002

Copyright Teemu Kerola 2002

2

One Class Open Network Solution ⁽³⁾

$$\begin{aligned} X_0 &= \lambda & X_i &= X_0 V_i = \lambda V_i \\ U_i &= X_i S_i = \lambda V_i S_i = \lambda D_i = X_0 D_i \end{aligned}$$

Need S_i or D_i ?

$$\left. \begin{aligned} \bar{n}_i &= X_i R_i = X_i S_i [1 + \bar{n}_i] = U_i [1 + \bar{n}_i] \Rightarrow \bar{n}_i = \frac{U_i}{1 - U_i} \\ R_i &= S_i [1 + \bar{n}_i] = \frac{S_i}{1 - U_i} \end{aligned} \right\} \text{(queue dev)}$$

$$\bar{n}_i = X_i R_i = X_i S_i = U_i \quad R_i = S_i \quad \text{(delay dev)}$$

$$R'_i = V_i R_i \quad R = \sum R'_i = \sum V_i R_i \quad \bar{n} = \sum \bar{n}_i$$


Must have $U_i \leq 1.0$ for all i . Why? What if $U_i > 1.0$?

10.4.2002

Copyright Teemu Kerola 2002

3

Open Network

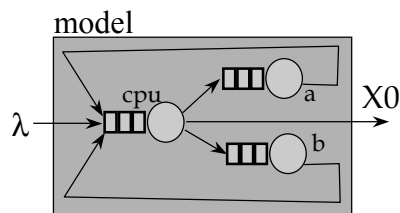

measurements

$T = 3600$ s
 Busy: $B_{\text{cpu}} = 1728$
 $B_a = 1512$ $B_b = 2592$
 Arrivals: $A = 10800$
 $A_a = 75600$ $A_b = 86400$

visit ratios, service times, solution

$$\begin{aligned} X_0 &= 10800/3600 = 3 \\ V_{\text{cpu}} &= 1+7+8 = 16 & V_a &= 75600/10800 = 7 & V_b &= 86400/10800 = 8 \\ D_{\text{cpu}} &= 1728/10800 = 0.16 & D_a &= 1512/10800 = 0.14 \text{ s} & D_b &= 2592/10800 = 0.24 \text{ s} \\ S_{\text{cpu}} &= 0.16/16 = 0.01 \text{ s} & S_a &= 0.14/7 = 0.02 \text{ s} & S_b &= 0.24/8 = 0.03 \text{ s} \\ U_{\text{cpu}} &= X_0 D_{\text{cpu}} = 0.48 & U_a &= 3 \times 0.14 = 0.42 & U_b &= 0.72 \\ R_{\text{cpu}} &= S_{\text{cpu}}/(1-U_{\text{cpu}}) = 0.0192 & R_a &= 0.0345 & R_b &= 0.03/0.28 = 0.107 \\ \bar{R} &= \sum V_i R_i = 1.406 \text{ s} \\ \bar{N}_{\text{cpu}} &= U_{\text{cpu}}/(1-U_{\text{cpu}}) = 0.923 & \bar{N}_a &= 0.42/0.58 = 0.72 & \bar{N}_b &= 0.72/0.28 = 2.571 \\ \bar{N} &= \sum \bar{N}_i = 4.214 \end{aligned}$$


10.4.2002

Copyright Teemu Kerola 2002

4

Multiple Class Open Network

- Still “easy” though more complex than single class case

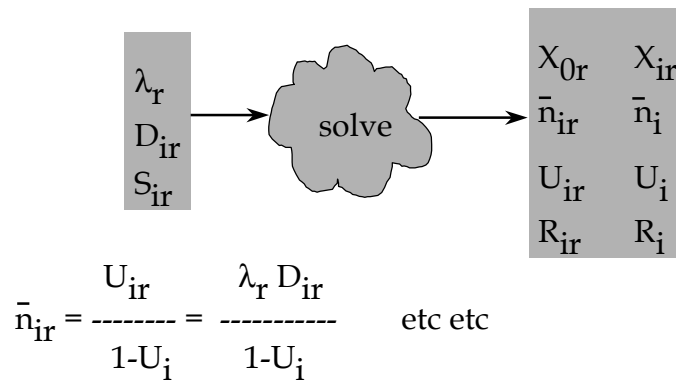

10.4.2002

Copyright Teemu Kerola 2002

5

Multiple Class Open Network

$$\begin{aligned}
 X_{0r} &= \lambda_r & X_{ir} &= X_0 V_{ir} = \lambda_r V_{ir} \\
 U_{ir} &= X_{0r} V_{ir} S_{ir} = \lambda_r D_{ir} = X_{0r} D_{ir} & U_i &= \sum U_{ir} \leq 1.0 \text{ must have!} \\
 R'_{ir} &= D_{ir} [1 + \bar{n}_{ir}(\lambda)] = D_{ir} [1 + \bar{n}_i] \\
 \bar{n}_{ir} &= \lambda_r V_{ir} R_{ir} = \lambda_r R'_{ir} = \lambda_r D_{ir} [1 + \bar{n}_i] = U_{ir} [1 + \bar{n}_i] \\
 \therefore 1 + \bar{n}_i &= \bar{n}_{ir} / U_{ir} = \bar{n}_{is} / U_{is} \quad \forall s \\
 \bar{n}_{ir} &= U_{ir} \left[1 + \sum_s \bar{n}_{is} \right] = U_{ir} + \sum_s U_{ir} \bar{n}_{is} = U_{ir} + \sum_s \frac{\bar{n}_{ir}}{\bar{n}_{is}} U_{is} \bar{n}_{is} = U_{ir} + \bar{n}_{ir} U_i \\
 \therefore \bar{n}_{ir} &= \frac{U_{ir}}{1 - U_i} = \frac{\lambda_r D_{ir}}{1 - U_i} \quad \text{and} \quad R'_{ir} = \frac{\bar{n}_{ir}}{\lambda_r} = \frac{D_{ir}}{1 - U_i} \quad (\text{queue dev}) \\
 R_{ir} &= \frac{S_{ir}}{1 - U_i} \quad \leftarrow R_r = \sum_i R'_{ir} \quad \bar{n}_i = \sum_{ir} \bar{n}_{ir} \quad \bar{n} = \sum_i \bar{n}_i \quad \text{Need } S_{ir}!
 \end{aligned}$$

Fig. 6.7
[Men 94]

10.4.2002

Copyright Teemu Kerola 2002

6

Multiple Class Open Network Solution (8)

$$X_{0r} = \lambda_r \quad X_{ir} = X_0 V_{ir} = \lambda_r V_{ir}$$

$$U_{ir} = X_{0r} V_{ir} S_{ir} = \lambda_r D_{ir} = X_{0r} D_{ir} \quad U_i = \sum U_{ir} \leq 1.0 \text{ must have!}$$

$$R'_{ir} = D_{ir} [1 + \bar{n}_{ir}(\lambda)] = D_{ir} [1 + \bar{n}_i]$$

$$\bar{n}_{ir} = \lambda_r V_{ir} R_{ir} = \lambda_r R'_{ir} = \lambda_r D_{ir} [1 + \bar{n}_i] = U_{ir} [1 + \bar{n}_i]$$

$$\therefore 1 + \bar{n}_i = \bar{n}_{ir} / U_{ir} = \bar{n}_{is} / U_{is} \quad \forall s$$

$$\bar{n}_{ir} = U_{ir} \left[1 + \sum_s \bar{n}_{is} \right] = U_{ir} + \sum_s U_{ir} \bar{n}_{is} = U_{ir} + \sum_s \frac{\bar{n}_{ir}}{\bar{n}_{is}} U_{is} \bar{n}_{is} = U_{ir} + \bar{n}_{ir} U_i$$

$$\therefore \bar{n}_{ir} = \frac{U_{ir}}{1 - U_i} = \frac{\lambda_r D_{ir}}{1 - U_i} \quad \text{and} \quad R'_{ir} = \frac{\bar{n}_{ir}}{\lambda_r} = \frac{D_{ir}}{1 - U_i} \quad (\text{queue dev})$$

$$R_{ir} = \frac{S_{ir}}{1 - U_i} \quad R_r = \sum_i R'_{ir} \quad n_i = \sum_{ir} \bar{n}_{ir} \quad \bar{n} = \sum_i \bar{n}_i \quad \text{Need } S_{ir}!$$

Fig. 6.7
[Men 94]

10.4.2002
Copyright Teemu Kerola 2002
7

Open Model Example

File server

measurement

T=3600 sec	18000 file reads, 7200 writes, 3600 other
	5 / sec 2 / sec 1 / sec
CPU util 32%	(9% read, 18% write, 5% other)
disk util 48%	(20% read, 20% write, 8% other)

$$D_{\text{disk,read}} = U_{\text{disk,read}} / X_{0,\text{read}} = 0.2/5 = 0.040, \quad D_{\text{cpu,read}} = 0.018$$

$$D_{\text{disk,write}} = 0.1, \quad D_{\text{cpu,write}} = 0.090$$

$$D_{\text{disk,other}} = 0.080, \quad D_{\text{cpu,other}} = 0.050$$

10.4.2002
Copyright Teemu Kerola 2002
8

Open Model Example (contd)

$$\begin{aligned} D_{\text{disk,read}} &= U_{\text{disk,read}} / X_{0,\text{read}} = 0.2/5 = 0.040, & D_{\text{cpu,read}} &= 0.018 \\ D_{\text{disk,write}} &= 0.1, & D_{\text{cpu,write}} &= 0.090 \\ D_{\text{disk,other}} &= 0.080, & D_{\text{cpu,write}} &= 0.050 \end{aligned}$$

$$\text{HW specs} \rightarrow S_{\text{disk}} = 0.020$$

$$V_{\text{disk,read}} = 2 \quad V_{\text{disk,write}} = 5 \quad V_{\text{disk,other}} = 4$$

$$V_{\text{proc,read}} = 1 + V_{\text{disk,read}} = 3 \quad V_{\text{proc,write}} = 6 \quad V_{\text{proc,other}} = 5$$

$$S_{\text{proc,read}} = 0.006 \quad S_{\text{proc,write}} = 0.015 \quad S_{\text{proc,other}} = 0.100$$

(Tbl 6.8)

10.4.2002

Copyright Teemu Kerola 2002

9

Open Model Example (contd)

Try first simple single class model?

weight = system
arrival rate

$$\begin{aligned} D_{\text{cpu}} &= (0.018 * 5 + 0.090 * 2 + 0.050 * 1) / 8 = 0.040 \\ D_{\text{disk}} &= (0.04 * 5 + 0.10 * 2 + 0.08 * 1) / 8 = 0.06 \\ \lambda &= 8 \text{ (jobs per sec)} \end{aligned}$$

$$U_{\text{cpu}} = \lambda D_{\text{cpu}} = 8 * 0.040 = 0.320 \quad U_{\text{disk}} = 0.480$$

$$\begin{aligned} R'_{\text{cpu}} &= D_{\text{cpu}} / (1 - U_{\text{cpu}}) = 0.040 / 0.680 = 0.059 \\ R'_{\text{disk}} &= 0.060 / 0.520 = 0.115 \\ R &= 0.174 \end{aligned}$$

10.4.2002

Copyright Teemu Kerola 2002

10

Open Model Example (contd)

Modification A. What if twice as many workstations? $\lambda = 16$

$$U_{\text{cpu}} = \lambda D_{\text{cpu}} = 16 * 0.040 = 0.640 \quad U_{\text{disk}} = \mathbf{0.960 (!!)}$$

$$\begin{aligned} R'_{\text{cpu}} &= D_{\text{cpu}} / (1 - U_{\text{cpu}}) = 0.040 / 0.360 = 0.111 \\ R'_{\text{disk}} &= 0.060 / 0.04 = 1.5 \\ R &= 1.611 \end{aligned}$$

Not good. How to get R down?

10.4.2002

Copyright Teemu Kerola 2002

11

Open Model Example (contd)

Modification B. Also server cache: 70% hit ratio for reads

$$V_{\text{disk,read}} \text{ goes down 70\%, } D_{\text{disk,read}} = 0.3 * 0.040 = 0.012$$

D_{ir}	Read	Write	Other
CPU	0.018	0.090	0.050
DISK	0.012	0.100	0.080
λ_r	10	4	2

$$\begin{aligned} U_{\text{ir}} &= \lambda_r D_{\text{ir}} & U_i &= \sum U_{\text{ir}} \\ R'_{\text{ir}} &= D_{\text{ir}} / (1 - U_i) \\ n_{\text{ir}} &= U_{\text{ir}} / (1 - U_i) \\ n_i &= \sum n_{\text{ir}} \\ n &= \sum n_i = 3.925 \end{aligned}$$

see next slide on server cache calculations! →


$$R = (0.0875, 0.5625, 0.389) \text{ OK}$$

10.4.2002

Copyright Teemu Kerola 2002

12

Open Model Example (contd)

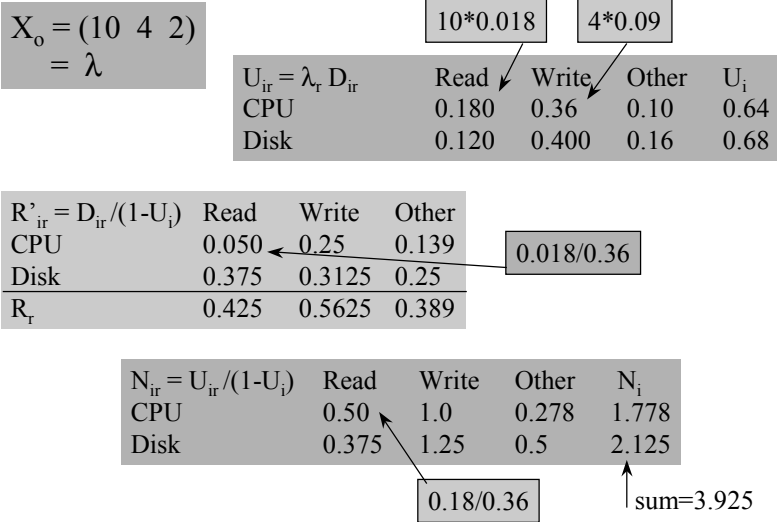

10.4.2002

Copyright Teemu Kerola 2002

13

Open Model Example (contd)

Modification C. Client Cache (write through)

Save 70% of reads: $\lambda_r = 30\% \ 10 = 3$

Modification D. Disk Upgrade:
 Another similar disk

$D_{disk1,r} = D_{disk2,r} = D_{disk,r} / 2$

weighted average response time:

Tbl 6.9

Tbl 6.10

10.4.2002

Copyright Teemu Kerola 2002

14


10.4.2002

Copyright Teemu Kerola 2002

15

Mixed Models

- Open and closed job classes

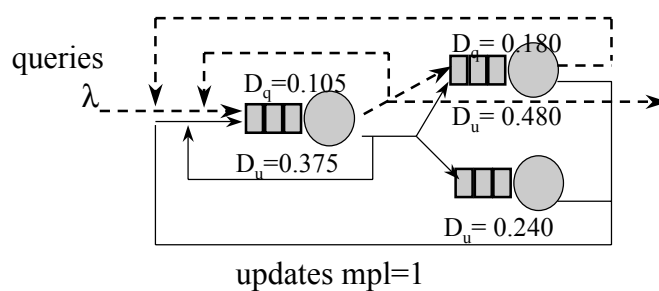

- Load independent servers


10.4.2002

Copyright Teemu Kerola 2002

16

Mixed Models Solution

- 1. Solve for open job classes




NOT: R_{ir} R'_{ir}
 n_{ir}

- 2. Slow down for closed classes

$$D_{ir}^{new} = D_{ir}^{new} / (1 - U_i^{open})$$

- 3. Solve for closed classes with MVA



- 4. Solve R'_{ir} , R_r , n_{ir} for open classes

$$\begin{aligned} \text{open} &\rightarrow R'_{ir} = D_{ir} (1 + n_i^{closed}) / (1 - U_i^{open}) \\ &\rightarrow n_{ir} = X_{0,r} R'_{ir} = \lambda_r R'_{ir} \end{aligned}$$

10.4.2002

Copyright Teemu Kerola 2002

17

Step 4?

- 4. Solve R'_{ir} , R_r , n_{ir} for open classes

why only “closed”? why only “open”?

$$\begin{aligned} \text{open} &\rightarrow R'_{ir} = D_{ir} (1 + n_i^{closed}) / (1 - U_i^{open}) \\ &\rightarrow n_{ir} = X_{0,r} R'_{ir} = \lambda_r R'_{ir} \end{aligned}$$

plain open model: $R'_{ir} = D_{ir} / (1 - U_i)$

10.4.2002

Copyright Teemu Kerola 2002

18

Mixed Model Example ⁽²⁾

Measurement data: Tbl 6.11

1. $U_{\text{cpu},q} = \lambda D_{\text{ir}} = 4.09 * 0.105 = 0.4295$
 $U_{\text{D1},q} = 4.09 * 0.180 = 0.7362$ $U_{\text{D2},q} = 4.09 * 0 = 0$
2. $D_{\text{cpu},u} = 0.375 / (1 - 0.4295) = 0.375 / 0.5705 = 0.657$
 $D_{\text{D1},u} = 0.480 / 0.2638 = 1.820$ $D_{\text{D1},u} = 0.240 / 1 = 0.240$
3. $R_u = \sum D_{\text{ir}} = 2.717$
 $X_{0,u} = N / R = 0.368$
 $n_{\text{cpu},u} = X_{0,u} R'_{\text{cpu},u} = X_{0,u} D_{\text{cpu},u} = 0.368 * 0.657 = 0.242$
 $n_{\text{D1},u} = 0.368 * 1.820 = 0.670$
 $n_{\text{D2},u} = 0.368 * 0.240 = 0.088$
 $U_{\text{cpu},u} = X_{0,u} D_{\text{cpu},u} = n_{\text{cpu},u}$

10.4.2002

Copyright Teemu Kerola 2002

19

Mixed Model Example (contd)

4. $R'_{\text{cpu},q} = D_{\text{cpu},q} (1 + n_{\text{cpu}}^{\text{closed}}) / (1 - U_{\text{cpu}}^{\text{open}})$
 $= 0.105 (1 + 0.242) / (1 - 0.4295) = 0.229$
 $R'_{\text{D1},q} = 0.180 (1 + 0.670) / (1 - 0.7362) = 1.140$
 $R'_{\text{D2},q} = 0$
 $R_q = \sum R'_{iq} = 1.369$
 $n_{\text{cpu},q} = X_{0,q} R'_{\text{cpu},q} = 4.09 * 0.229 = 0.9366$
 $n_{\text{D1},q} = 4.09 * 1.140 = 4.6626$ $n_{\text{D2},q} = 0$

10.4.2002

Copyright Teemu Kerola 2002

20

