

Concurrency at Programming Language Level

Ch 2 [BenA 06]

Abstraction
Pseudo-language
BACI
Ada, Java, etc.

Levels of Abstraction

- Granularity of operations
 - Invoke a library module
 - Statement in high level programming language
 - Instruction in machine language
- Atomic statement
 - Anything that we can guarantee to be atomic
 - Executed completely “at once”
 - Always the same correct atomic result
 - Result does not depend on anybody else
 - Can be at any granularity
 - Can *trust* on that atomicity

Atomic Statement

- Atomicity guaranteed somehow
 - Machine instruction: HW
 - Memory bus transaction
 - Programming language statement, set of statements, or set of machine instructions
 - SW
 - Manually coded
 - Disable interrupts
 - OS synchronization primitives
 - Library module
 - SW
 - Manually coded inside
 - Provided automatically to the user by programming environment

Load R1, Y

Read mem(0x35FA8300)

-- start atomic
 Load R1, Y
 Sub R1, =1
 Jpos R1, Here
 -- end atomic

Monitors
 Ch 7 [BenA 06]

16.10.2009

Copyright Teemu Kerola 2009

3

Concurrent Program

- Sequential process
 - Successive atomic statements
- P: p1 → p2 → p3 → p4 ...

 - Control pointer (= program counter)
- Concurrent program
 - Finite set of sequential processes working for same goal
 - Arbitrary interleaving of atomic statements in different processes

3 processes (P, R, Q) interleaved execution

p3, ...

↑ cp_p

p1, r1, p2, q1

← q2, ...

↑ cp_q

r2, ...

↑ cp_r

P: p1 → p2

p1 → q1 → p2 → q2,

Q: q1 → q2

p1 → q1 → q2 → p2,

p1 → p2 → q1 → q2,

q1 → p1 → q2 → p2,

q1 → p1 → p2 → q2,

q1 → q2 → p1 → p2.

?

~~p1 → q2 → p2 → q1~~

16.10.2009


Copyright Teemu Kerola 2009

4

Program State, Pseudo-language


- Sequential program

pseudo-kieli

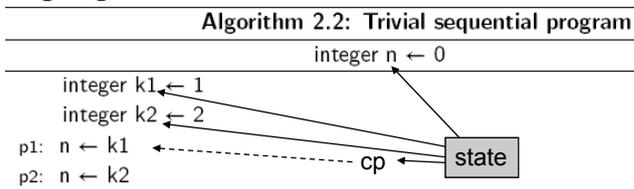

- State

- next statement to execute (cp, i.e., PC)
- variable values

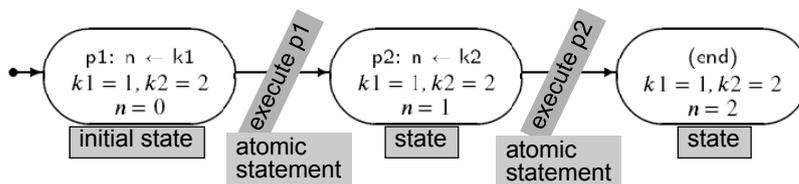


16.10.2009

Copyright Teemu Kerola 2009

5

(Global) Program State

- Concurrent program

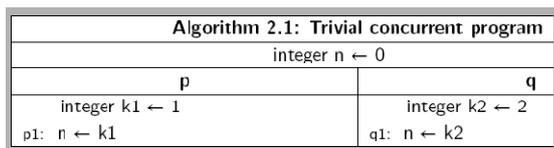


- Local state for each process:

- cp
- Variable values
 - Local & global

- Global state for program

- All cp's
- All local variables
- All global variables

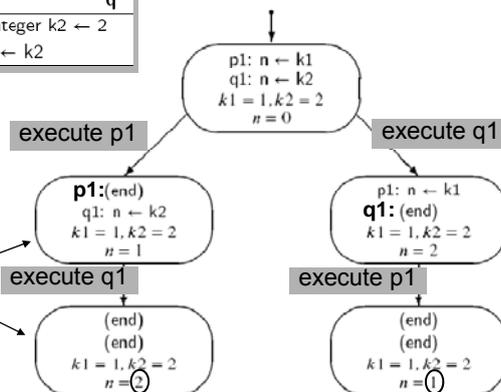

16.10.2009

Copyright Teemu Kerola 2009

6

Possible Program States

- List of processes in program
 - List of values for each process
 - cp
 - value of each local/global/shared variable

p1: $n \leftarrow k1$
 q1: $n \leftarrow k2$
 $k1 = 1, k2 = 2$
 $n = 0$

state: { { p1: $n \leftarrow k1$ – process p
 $k1 = 1$ }
 { q1: $n \leftarrow k2$ – process q
 $k2 = 2$ }
 $n = 0$ – shared variable
 }

- Nr of possible states can be (very) large
 - Not all states are reachable states!

unreachable state: { { p1: $n \leftarrow k1$
 $k1 = 2$ }
 { q1: $n \leftarrow k2$
 $k2 = 1$ }
 $n = 3$ }
 }

(saavutettavissa, saavutettava tila)

16.10.2009
Copyright Teemu Kerola 2009
7

State Diagram and Scenarios

Process p	Process q	n	k1	k2
p1: $n \leftarrow k1$	q1: $n \leftarrow k2$	0	1	2
(end)	q1: $n \leftarrow k2$	1	1	2
(end)	(end)	2	1	2

Scenario 1 (left side)

State diagram

```

graph TD
    S0["(p1) n ← k1  
(q1) n ← k2  
k1 = 1, k2 = 2  
n = 0"]
    S1["(end)  
(q1) n ← k2  
k1 = 1, k2 = 2  
n = 1"]
    S2["(end)  
(end)  
k1 = 1, k2 = 2  
n = 2"]
    S3["p1: n ← k1  
(end)  
k1 = 1, k2 = 2  
n = 2"]
    S4["(end)  
(end)  
k1 = 1, k2 = 2  
n = 1"]

    S0 -- "transition: exec. p1" --> S1
    S0 -- "transition: exec. q1" --> S2
    S1 -- "transition: exec. q1" --> S4
    S2 -- "exec. p1" --> S3
    
```

- Transitions from one possible state to another
 - Executed statement must be one of those in the 1st state
- State diagram for concurrent program
 - Contains all reachable states and transitions
 - All possible executions are included, they are all correct!

16.10.2009
Copyright Teemu Kerola 2009
8

Algorithm 2.1: Trivial concurrent program

integer $n \leftarrow 0$	
p	q
integer $k1 \leftarrow 1$	integer $k2 \leftarrow 2$
p1: $n \leftarrow k1$	q1: $n \leftarrow k2$

Atomic Statements

- Two scenarios
 - Both correct
 - Different results

NO need to have the same result!
Statements do the same, but overall result may be different.
(see p. 19 [BenA 06])

- Atomic?
 - Assignment
 - Boolean expression
 - Increment

16.10.2009 Copyright Teemu Kerola 2009 9

Algorithm 2.3: Atomic assignment statements

integer $n \leftarrow 0$					
p			q		
p1: $n \leftarrow n + 1$				q1: $n \leftarrow n + 1$	

- Two scenarios for execution
 - Both correct
 - Both have the same result

P first, and then Q			Q first, and then P		
Process p	Process q	n	Process p	Process q	n
p1: $n \leftarrow n + 1$	q1: $n \leftarrow n + 1$	0	p1: $n \leftarrow n + 1$	q1: $n \leftarrow n + 1$	0
(end)	q1: $n \leftarrow n + 1$	1	p1: $n \leftarrow n + 1$	(end)	1
(end)	(end)	2	(end)	(end)	2

16.10.2009 Copyright Teemu Kerola 2009 10

Algorithm 2.3: Atomic assignment statements

integer $n \leftarrow 0$

p	q
p1: $n \leftarrow n + 1$	q1: $n \leftarrow n + 1$

Same statements with smaller atomic granularity:

Algorithm 2.4: Assignment statements with one global reference

integer $n \leftarrow 0$

p	q
integer temp p1: temp $\leftarrow n$ p2: $n \leftarrow temp + 1$	integer temp q1: temp $\leftarrow n$ q2: $n \leftarrow temp + 1$

16.10.2009Copyright Teemu Kerola 200911

Too Small Atomic Granularity

Algorithm 2.4: Assignment statements with one global reference

integer $n \leftarrow 0$

p	q
integer temp p1: temp $\leftarrow n$ p2: $n \leftarrow temp + 1$	integer temp q1: temp $\leftarrow n$ q2: $n \leftarrow temp + 1$

- Scenario 1 →
– OK
- Scenario 2 →
– Bad result
- From now on →
– Assignments and Boolean evaluations are atomic!

Process p	Process q	n	p.temp	q.temp
p1: temp $\leftarrow n$	q1: temp $\leftarrow n$	0	?	?
p2: $n \leftarrow temp + 1$	q1: temp $\leftarrow n$	0	0	?
(end)	q1: temp $\leftarrow n$	1	0	?
(end)	q2: $n \leftarrow temp + 1$	1	0	1
(end)	(end)	2	0	1

Process p	Process q	n	p.temp	q.temp
p1: temp $\leftarrow n$	q1: temp $\leftarrow n$	0	?	?
p2: $n \leftarrow temp + 1$	q1: temp $\leftarrow n$	0	0	?
p2: $n \leftarrow temp + 1$	q2: $n \leftarrow temp + 1$	0	0	0
(end)	q2: $n \leftarrow temp + 1$	0	0	0
(end)	(end)	1	0	0

16.10.2009Copyright Teemu Kerola 200912

Correctness

- What is the correct answer?
- Usually clear for sequential programs
- Can be fuzzy for concurrent programs
 - Many correct answers?
 - What is intended semantics of the program?
 - Run programs 100 times, each time get different answer?
 - Each answer is correct, if program is correct!
 - Does not make debugging easier!
 - Usually can not test all possible scenarios (too many!)
 - How to define correctness for concurrent programs?
 - Safety properties = properties that are always true
 - Liveness properties = properties that eventually become true

“turvallisuus”

“elävyys”

16.10.2009

Copyright Teemu Kerola 2009

13

Safety and Liveness

- Safety property safety-ominaisuus, turvallisuus
 - property must be true all the time
 - “Identity”
 - $\text{memFree} + \text{memAllocated} = \text{memTotal}$ identiteetti, invariantti
 - Mouse cursor is displayed
 - System responds to new commands
- Liveness property elävyys, liveness-ominaisuus
 - Property must eventually become true
 - Variable n value = 2
 - System prompt for next command is shown
 - Control will resume to calling program
 - Philosopher will get his turn to eat
 - Eventually the mouse cursor is not displayed
 - Program will terminate
- Duality of safety and liveness properties
 - $\{ P_i \text{ will get his turn to eat} \} \equiv \text{not } \{ P_i \text{ will never get his turn to eat} \}$
 - $\{ n \text{ value will become 2} \} \equiv \text{not } \{ n \text{ value is always } \neq 2 \}$

16.10.2009

Copyright Teemu Kerola 2009

14

Linear Temporal Logic (LTL)

(lineaarinen) temporaalilogiikka

- Define safety and liveness properties for certain state in some (arbitrary) scenario
 - Example of Modal Temporal Logic (MDL), logic on concepts like possibility, impossibility, and necessity
- **Alternative: Branching Temporal Logic (BTL)**
 - Properties true in some or all states starting from the given state
 - More complex, because all future states must be covered
 - **Common Temporal Logic (CTL)**
 - Can be checked automatically
 - Every time computation reaches given state
 - SMV model checker
 - NuSMV model checker

16.10.2009

Copyright Teemu Kerola 2009

15

Fairness

reiluus

- (Weakly) fair scenario
 - Wanted condition eventually occurs
 - Nobody is locked out forever
 - Will a philosopher ever get his turn to eat?
 - Will an algorithm eventually stop?

Algorithm 2.5: Stop the loop A	
integer n ← 0	
boolean flag ← false	
p	q
p1: while flag = false	q1: flag ← true
p2: n ← 1 - n	q2:

- All scenarios should be fair
 - One requirement in correct solution

16.10.2009

Copyright Teemu Kerola 2009

16

Machine Language Code

- What is atomic and what is not?
 - Assignment? `X = Y;`
 - Increment? `X = X+1;`

Algorithm 2.6: Assignment statement for a register machine	
integer $n \leftarrow 0$	
P	Q
p1: load R1,n	q1: load R1,n
p2: add R1,#1	q2: add R1,#1
p3: store R1,n	q3: store R1,n

16.10.2009


Copyright Teemu Kerola 2009

17

Critical Reference

kriittinen viite

- Reference to variable v is critical reference, if ...
 - Assigned value in P and read in Q
 - Read directly or in a statement



- Program satisfies limited-critical-reference (LCR)

- Each statement has at most one critical reference
- Easier to analyze than without this property
- Each program is easy to transform into similar program with LCR

rajoitettu kriittinen viite

	P	Q	
Not LCR:	<code><u>n</u> = <u>n</u>+1;</code>	<code><u>n</u> = <u>n</u>+1</code>	Bad
Not LCR:	<code><u>n</u> = <u>m</u>+1;</code>	<code><u>m</u> = <u>n</u>+1</code>	Bad
LCR:	<code>tempP = <u>n</u>+1; <u>n</u> = tempP;</code>	<code>tempQ = <u>n</u>+1; <u>n</u> = tempQ;</code>	Good

LCR vs. atomicity?
(ouch)

16.10.2009

Copyright Teemu Kerola 2009

18

Volatile and non-atomic variables

- Volatile variable riskialtis
 - Can be modified by many processes (must be in shared memory)
 - Advice for compiler (pragma)
 - Keep something in memory, not in register
 - Pseudocode – does not generate code
- Non-atomic variables
 - Multiword data structures: long ints, arrays, records, ...
 - Force access to be indivisible in given order

What if compiler/hw decides to keep value of n in a register/cache? When is it stored back to memory? What if local1 & local2 were volatile?

Algorithm 2.8: Volatile variables

integer \textcircled{n} \leftarrow 0	
p	q
integer local1, local2 p1: $n \leftarrow$ some expression store n? p2: computation not using n exec. p3: $\text{local1} \leftarrow (n + 5) * 7$ order? p4: $\text{local2} \leftarrow n + 5$ p5: $n \leftarrow \text{local1} * \text{local2}$ store n?	integer local q1: $\text{local} \leftarrow n + 6$ q2: q3: which n? q4: q5:

16.10.2009

Copyright Teemu Kerola 2009

19

Example Program with Volatile Variables

Algorithm 2.9: Concurrent counting algorithm

integer n \leftarrow 0	
p	q
integer temp p1: do 10 times p2: temp \leftarrow n p3: n \leftarrow temp + 1	integer temp q1: do 10 times q2: temp \leftarrow n q3: n \leftarrow temp + 1

- Can implement it in any concurrent programming language
 - (Extended) Pascal and (Extended) C
 - BACI (Ben-Ari Concurrency Interpreter)
 - Code automatically compiled (from Extended Pascal or C)
 - Ada
 - Java

16.10.2009

Copyright Teemu Kerola 2009

20

(Ben-Ari Concurrent Pascal)

possibly volatile

Concurrent Program in Pascal

```

1 program count;
2 var n: integer := 0;
3
4 procedure p;
5 var temp, i: integer;
6 begin
7   for i := 1 to 10 do
8     begin
9       temp := n;
10      n := temp + 1
11    end
12 end;

```

n is volatile, because... it is assigned in one thread, and read in the other

```

16 procedure q;
17 var temp, i: integer;
18 begin
19   for i := 1 to 10 do
20     begin
21       temp := n;
22       n := temp + 1
23     end
24   end;
25
26 begin { main program }
27   cobegin p; q coend;
28   writeln('The value of n is ', n)
29 end.

```

16.10.2009 Copyright Teemu Kerola 2009 21

(Ben-Ari Concurrent C, C--)

possibly volatile, use carefully
(volatile, if critically referenced)

```

1 int n = 0;
2
3 void p() {
4   int temp, i;
5   for (i = 0; i < 10; i++) {
6     temp = n;
7     n = temp + 1;
8   }
9 }
10

```

```

16 void q() {
17   int temp, i;
18   for (i = 0; i < 10; i++) {
19     temp = n;
20     n = temp + 1;
21   }
22 }
23
24 void main() {
25   cobegin { p(); q(); }
26   cout << "The value of n is " << n << "\n";
27 }

```

What if compiler optimized and kept n in a register?
Let's hope not!
(in ExtPascal or C--
global (volatile) variables are seemingly kept in memory by default)

16.10.2009 Copyright Teemu Kerola 2009 22

Concurrent Program in Ada

```

1  with Ada.Text_IO; use Ada.Text_IO;
2  procedure Count is
3      N: Integer := 0;
4      pragma Volatile(N);
5
6      task type Count_Task;
7      task body Count_Task is
8          Temp: Integer;
9      begin
10         for I in 1..10 loop
11             Temp := N;
12             N := Temp + 1;
13         end loop;
14     end Count_Task;
15
16 begin
17     declare
18         P, Q: Count_Task;
19     begin
20         null;
21     end;
22     Put_Line("The value of N is " & Integer'Image(N));
23 end Count;
    
```

advice compiler to keep N in memory

How many threads really in parallel?
• how to control it?

Execute on 8-processor vera.cs.helsinki.fi?

16.10.2009 Copyright Teemu Kerola 2009 23

Concurrent Program in Java

```

1  class Count extends Thread {
2      static volatile int n = 0;
3
4      public void run() {
5          int temp;
6          for (int i = 0; i < 10; i++) {
7              temp = n;
8              n = temp + 1;
9          }
10     }
11 }
    
```

```

16  public static void main(String[] args) {
17      Count p = new Count();
18      Count q = new Count();
19      p.start ();
20      q.start ();
21
22      try {
23          p.join ();
24          q.join ();
25      }
26      catch (InterruptedException e) { }
27      System.out.println ("The value of n is " + n);
28  }
    
```

Thread.yield(); // force?

> javac Adder8.java
> java Adder8

16.10.2009 Copyright Teemu Kerola 2009 24

BACI http://www.mines.edu/fs_home/tcamp/baci/

- Ben-Ari Concurrency Interpreter
 - Write concurrent programs with
 - C-- or Ben-Ari Concurrent Pascal (.cm and .pm suffixes)
 - Compile and run in BACI
 - GUI for Unix/Linux
- jBACI <http://stwww.weizmann.ac.il/g-cs/benari/jbaci/>
 - Just like BACI
 - GUI for Windows
- Installation <http://stwww.weizmann.ac.il/g-cs/benari/jbaci/jbaci1-4-5.zip>
 - load version 1.4.5 jBACI executable files and example programs, unzip, edit config.cfg to have correct paths to bin/bacc.exe and bin/bapas.exe translators, click run.bat
- Use in class, homeworks and in project

16.10.2009
Copyright Teemu Kerola 2009
25

BACI Overall Structure

```

add.cm
...
void main() {
  cobegin { add10();
            add10(); }
...
            
```

C- -
(Concurrent C)

bacc.exe

C-- to PCODE
Compiler

```

add.pco
LOAD_ADDR, push sum
LOAD_VALUE, push local
PUSH_LIT 1
DO_ADD, pop(1), s[t]=(s[olddt-1]+s[olddt])
STORE, s[s[t-1]]=s[t], pop(2)
            
```

(many tables)

add.lst

```

...
17 24 void main() {
18 25   cobegin {add10(); add10(); }
...
            
```

Executing PCODE ...

```


C n =1  i =A  n =1  C2  i =
1 A
C n =4  i =2  C
B n =A  n =5  i =24 A
            
```

PCODE
Interpreter

bainterp.exe

<http://www.cs.helsinki.fi/u/kerola/rrio/BACI/baci-c.pdf>

16.10.2009
Copyright Teemu Kerola 2009
26

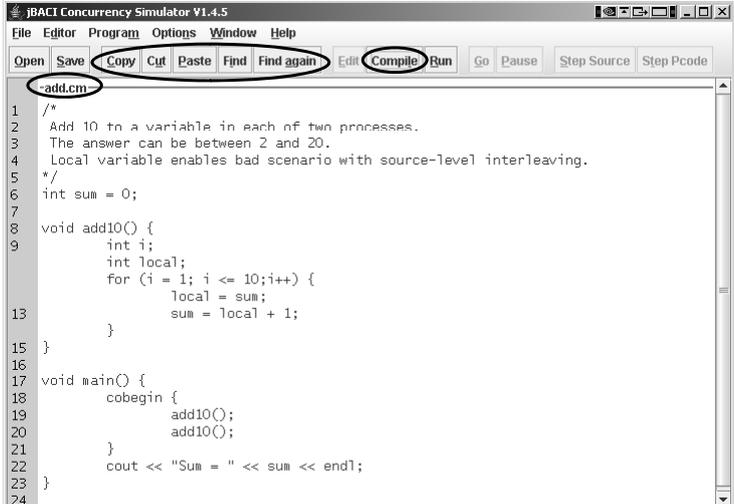

```

1 /*
2  Add 10 to a variable in each of two processes.
3  The answer can be between 2 and 20.
4  Local variable enables bad scenario with source-level interleaving.
5  */
6  int sum = 0;
7
8  void add10() {
9      int i;
10     int local;
11     for (i = 1; i <= 10; i++) {
12         local = sum;
13         sum = local + 1;
14     }
15 }
16
17 void main() {
18     cobegin {
19         add10();
20         add10();
21     }
22     cout << "Sum = " << sum << endl;
23 }
24
                
```

jBACI

Just like BACI, but with Java

- requires Java v. 1.4 (SDK or JRE)
- Built-in compiler and interpreter
- edit state
- run state

<http://www.cs.helsinki.fi/u/kerola/rio/BACI/jbaci.pdf>

16.10.2009
Copyright Teemu Kerola 2009
27

jBACI IDE (integrated development environment)




The IDE interface shows the following components:

- Processes List:** Shows three processes: '0 main' (Active: false), '1 add10' (Active: true), and '2 add10' (Active: false).
- Code Editors:** Three editors are open, showing the source code for 'main', 'add10', and another 'add10' process. The 'add10' code is:


```

for (i = 1; i <= 10; i++) {
    local = sum;
    sum = local + 1;
}
                
```
- Variable Monitors:**
 - Process 1 add10:** local = 4, sum = 13
 - Process 2 add10:** local = 11, sum = 9
 - Globals:** sum = 13
- Console:** Empty.
- Buttons:** 'Step Source' and 'Step Pcode' are circled in the menu.

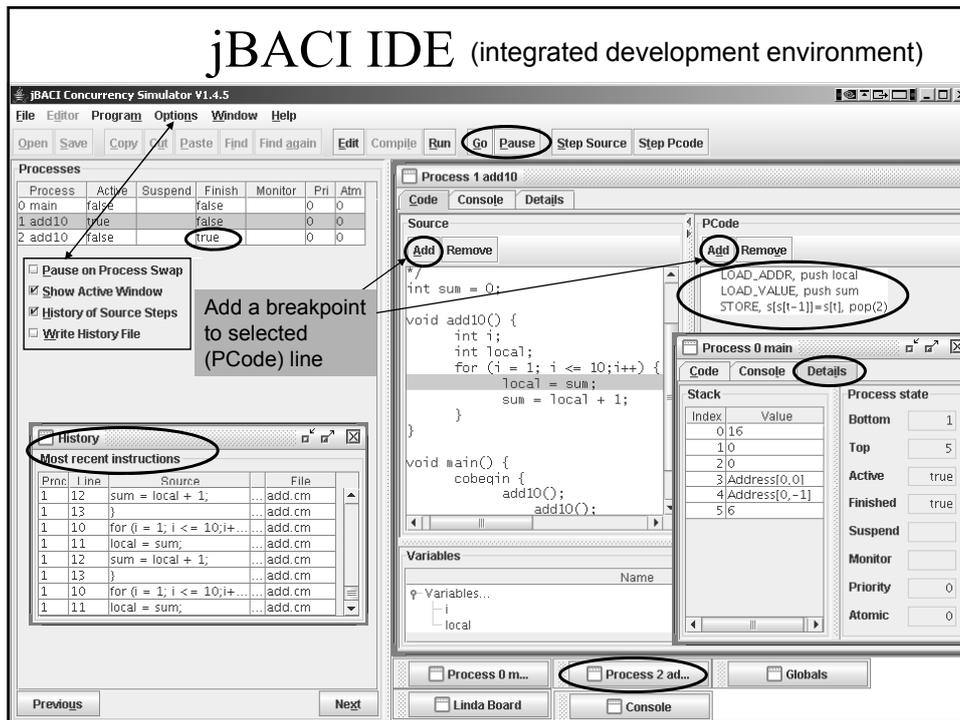

Summary

- Abstraction, atomicity
- Concurrent program, program state
- Pseudo-language algorithms
- High level language algorithms
- BACI