

Lesson 6

Semaphores

Ch 6 [BenA 06]

Semaphores
Producer-Consumer Problem
Semaphores in C--, Java, Linux

13.11.2008

Copyright Teemu Kerola 2008

1

Synchronization with HW support

- Disable interrupts
 - Good for short time wait, not good for long time wait
 - Not good for multiprocessors
 - Interrupts are disabled only in the processor used
- Test-and-set instruction (etc)
 - Good for short time wait, not good for long time wait
 - Nor so good in single processor system
 - May reserve CPU, which is needed by the process holding the lock
 - Waiting is usually “busy wait” in a loop
- Good for mutex, not so good for general synchronization
 - E.g., “wait until process P34 has reached point X”
 - No support for long time wait (in suspended state)
- Barrier wait in HW in some multicore architectures
 - Stop execution until all cores reached barrier_wait instruction
 - No busy wait, because execution pipeline just stops
 - Not to be confused with barrier_wait thread operation

13.11.2008

Copyright Teemu Kerola 2008

2

Semaphores

Edsger W. Dijkstra

semafori

http://en.wikipedia.org/wiki/THE_operating_system

- Dijkstra, 1965, THE operating system
- Protected variable, abstract data type (object)
 - Allows for concurrency solutions if used properly
- Atomic operations
 - Create (SemaName, InitValue)
 - P, down, wait, take, pend,
passeren, proberen, try, prolaad, try to decrease
 - V, up, signal, release, post,
vrijgeven, verlagen, verhoog, increase

13.11.2008 Copyright Teemu Kerola 2008 3

(Basic) Semaphore

public create semaphore S
initial value
integer value S.V

public P(S) private S.value
public V(S) private S.list

queue of waiting processes S.L

- P(S) WAIT(S), Down(S)
 - If value > 0, deduct 1 and proceed
 - o/w, wait suspended in list (queue?) until released
- V(S) SIGNAL(S), Up(S)
 - If someone in queue, release one (first?) of them
 - o/w, increase value by one

13.11.2008 Copyright Teemu Kerola 2008 4

General vs. Binary Semaphores

- General Semaphore
 - Value range: 0, 1, 2, 3,
 - nr processes doing P(S) and advancing without delay
 - Value: “Nr of free units”, “nr of advance permissions”
- Binary semaphore (or “*mutex*”)
 - Value range: 0, 1
 - Mutex lock (with suspended wait)
 - V(S) can (should!) be called only when value = 0
 - By process in critical section (CS)
 - Many processes can be in suspended in list
 - At most one process can proceed at a time

13.11.2008

Copyright Teemu Kerola 2008

5

Algorithm 6.1: Critical section with semaphores (N processes)

$\text{binary semaphore } S \leftarrow (1, \emptyset)$	
p	q
loop forever	loop forever
p1: non-critical section	q1: non-critical section
p2: wait(S)	q2: wait(S)
p3: critical section	q3: critical section
p4: signal(S)	q4: signal(S)

- Someone must create S
 - Value initialized to 1
- Possible wait in suspended state
 - Long time, hopefully at least 2 process switches

Some (operating) systems have “semaphores” with (optional) busy wait (i.e., busy-wait semaphore).
Beware of busy-wait locks hidden in such semaphores!

13.11.2008

Copyright Teemu Kerola 2008

6

General Semaphore Implementation

- P(S)


```

        if (S.value > 0)
          S.value = S.value - 1
        else
          suspend calling process P
          place P (last?) in S.list
          call scheduler()
      
```

*go to sleep ...
... wake up here*
- V(S)


```

        if (S.list == empty)
          S.value = S.value + 1
        else
          take arbitrary (or 1st ?) process Q
          from S.list
          move Q to ready-to-run list
          call scheduler()
      
```

Atomic
operations!
How?
Use HW mutex
support!

Tricky part:
section of CS
is in operating
system
scheduler?

13.11.2008

Copyright Teemu Kerola 2008

7

Semaphore Implementation

- Use HW-supported busy-wait locks to solve mutex-problem for semaphore operations
 - Short waiting times, a few machine instructions
- Use OS suspend operation to solve semaphore synchronization problem
 - Possibly very long, unlimited waiting times
 - Implementation at process control level in OS
 - This is the resume point for suspended process
 - Deep inside in privileged OS-module

13.11.2008

Copyright Teemu Kerola 2008

8

Semaphore Implementation Variants

- Take first process in S.list in V(S)?
 - Important semantic change, affects applications
 - Fairness
 - Strong semaphore
(vs. weak semaphore with no order in S.list)
- Add to/subtract from S.value first in P(S) and in V(S)?
 - Just another way to write code
- Scheduler call every time or sometimes at P or V end?
 - Semantic change, may affect applications
 - Execution turn may (likely) change with P even when process is not suspended in wait
 - Signalled process may start execution immediately

13.11.2008

Copyright Teemu Kerola 2008

9

Semaphore Implementation Variants

- S.value can be negative
 - Negative S.value gives the number of waiting processes?
 - Makes it easier to poll number of waiting processes
 - New user interface to semaphore object
 - `n = value(s);`
- Busy-wait semaphore
 - Wait in busy loop instead of in suspended state
 - Really a busy-wait lock that looks like a semaphore
 - Important semantic change, affects applications

13.11.2008


Copyright Teemu Kerola 2008

10

Blocking Semaphore

- Blocking
 - Normal (counting) semaphore with initial value = 0

– First P(S) will block, unless V(S) was executed

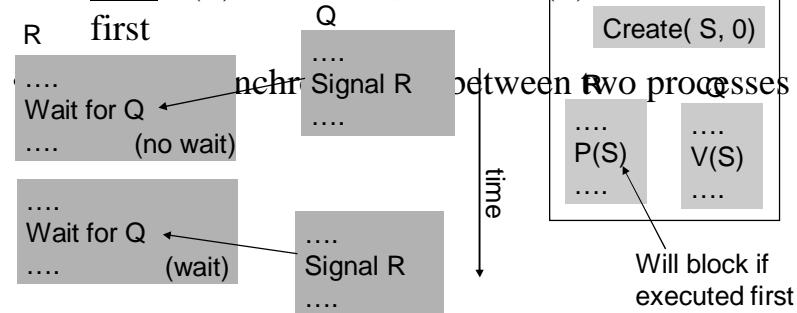

13.11.2008


Copyright Teemu Kerola 2008

11

Producer-Consumer Problem

- Synchronization problem
- Correct execution order
- Producer places data in buffer
 - Waits if finite size buffer full
- Consumer takes data from buffer
 - Same order as they were produced
 - Waits if no data available
- Variants
 - Cyclic finite buffer – usual case
 - Infinite buffer
 - Realistic sometimes!
 - External conditions rule out buffer overflow?
 - Can be implemented with finite buffer!
 - Many producers and/or many consumers

Tuottaja-kuluttaja
-ongelma



13.11.2008

Copyright Teemu Kerola 2008

12

Algorithm 6.6: Producer-consumer (infinite buffer)

		producer	consumer
		dataType d	dataType d
		loop forever	loop forever
p1:	d ← produce	(no wait!)	q1: wait(notEmpty)
p2:	append(d, buffer)		q2: d ← take(buffer)
p3:	signal(notEmpty)		q3: consume(d)

- Synchronization only one way (producer never waits)
 - Synchronization from producer to consumer
- Counting split semaphore notEmpty
 - Split = “different processes doing waits and signals”
 - Value = nr of data items in buffer
- Append/take might need to be indivisible operations
 - Protect with semaphores or busy-wait locks?
 - Not needed now? Maybe not? (only one producer/consumer)

13.11.2008

Copyright Teemu Kerola 2008

13

Algorithm 6.8: Producer-consumer (finite buffer, semaphores)



		producer	consumer
		dataType d	dataType d
		loop forever	loop forever
p1:	d ← produce	q1: wait(notEmpty)	
p2:	wait(notFull)	q2: d ← take(buffer)	
p3:	append(d, buffer)	q3: signal(notFull)	
p4:	signal(notEmpty)	q4: consume(d)	

- Synchronization both ways, both can wait
- New semaphore notFull: value = nr of free slots in buffer
- Split semaphore notEmpty & notFull
 - notEmpty.value + notFull.value = N in (p1, q4, ...)
 - When both at the beginning of loop, outside wait-signal area
 - wait(notFull)...signal(notEmpty), wait(notEmpty)...signal(notFull)

13.11.2008

Copyright Teemu Kerola 2008

14

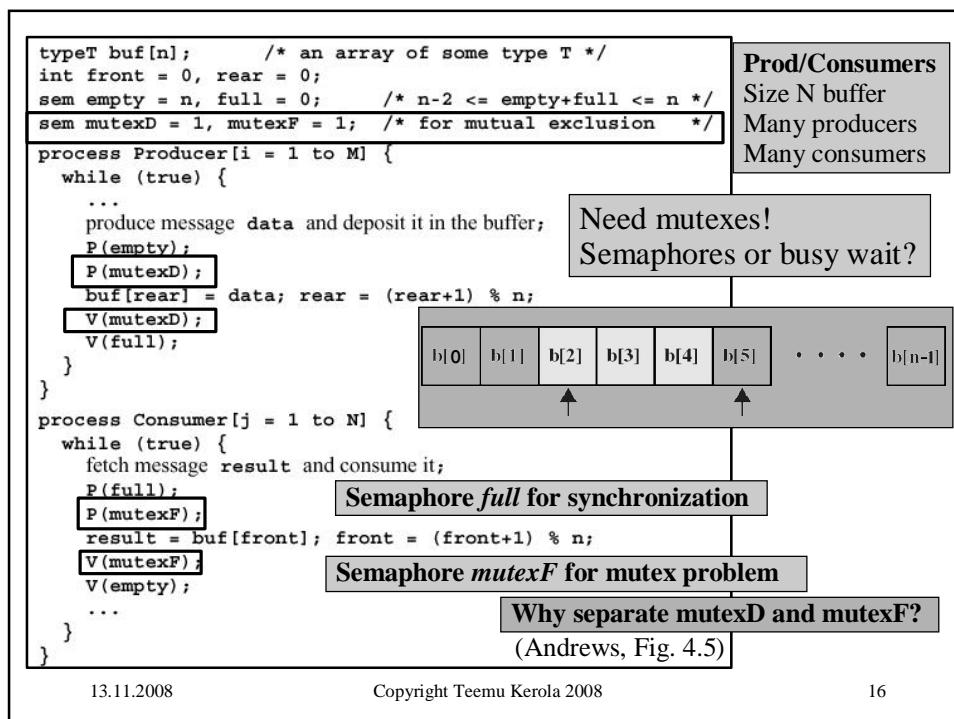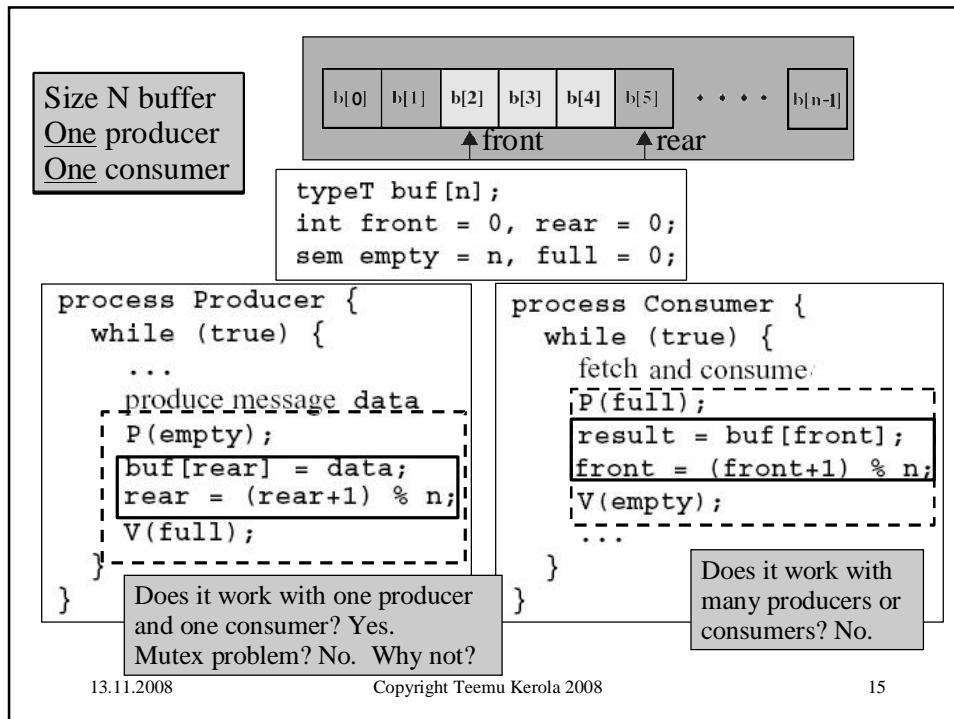

Barz's General Semaphore Simulation

- Starting point
 - Have binary semaphore
 - Need counting semaphore
 - Realistic situation
 - Operating system or programming language library may have only binary semaphores

k = 4
4 in CS, 2 in gate
1 completes CS
What now?

2 complete CS?

```

binary semaphore S ← 1
binary semaphore gate ← 1
integer count ← k

loop forever
  non-critical section
    p1: wait(gate)
    p2: wait(S)
    p3: P
    p4: count ← count - 1
    p5: if count > 0 then
    p6:   signal(gate)
    p7: signal(S)

  critical section
    p8: V
    p9: count ← count + 1
    p10: if count = 1 then
    p11:   signal(gate)
    p12: signal(S)
  
```

13.11.2008 Copyright Teemu Kerola 2008 17

Udding's No-Starvation Critical Section with Weak Split Binary Semaphores

- Weak semaphore
 - Set, not a queue in wait
- Split binary semaphore
 $0 \leq \text{gate1} + \text{gate2} \leq 1$
- Batch arrivals
 - Start service only when no more arrivals
 - Close gate1 during service
- No starvation
 - gate1 opened again only after whole batch in gate2 is serviced

```

semaphore gate1 ← 1, gate2 ← 0
integer numGate1 ← 0, numGate2 ← 0

p1: wait(gate1)
p2: numGate1 ← numGate1 + 1
p3: signal(gate1)
p4: wait(gate1)
p5: numGate2 ← numGate2 + 1
p6: numGate1 ← numGate1 - 1
p7: if numGate1 > 0
p8:   signal(gate1) someone in p4?
p9: else signal(gate2) last in batch
p10: wait(gate2)
p11: numGate2 ← numGate2 - 1
p12: if numGate2 > 0 others in "batch"
p13:   signal(gate2)
p14: else signal(gate1) last in batch
  
```

(Alg 6.14)₈

13.11.2008 Copyright Teemu Kerola 2008

Semaphore Features

- Utility provided by operating system or programming language library
- Can be used solve almost any synchronization problem
- Need to be used carefully
 - Easy to make profound errors
 - Forget V
 - Suspend process in critical section
 - No one can get CS to resume suspended process
 - Someone may be waiting in busy-wait loop
 - Deadlock
 - Need strong coding discipline

13.11.2008

Copyright Teemu Kerola 2008

19

```
/* program      diningphilosophers */
semaphore fork [5] = {1}; /* mutex, one at a time */
int i;
void philosopher (int i)
{
    while (true)
    {
        think();
        wait (fork[i]);           /* left fork */
        wait (fork [(i+1) mod 5]); /* right fork */
        eat();
        signal(fork [((i+1) mod 5)]);
        signal(fork[i]);
    }
}
void main()
{
    parbegin (philosopher (0), philosopher (1), philosopher (2),
              philosopher (3), philosopher (4));
}
```

(Fig. 6.12 [Stal06])
(Alg. 6.10 [BenA06])

Trivial
Solution
#1

- Possible deadlock – not good
 - All 5 grab left fork “at the same time”

13.11.2008

Copyright Teemu Kerola 2008

20

```

/* program diningphilosophers */
semaphore fork[5] = {1};
semaphore room = {4}; /* only 4 at a time, 5th waits */
int i;
void philosopher (int I)
{
    while (true)
    {
        think();
        wait (room);
        wait (fork[i]);
        wait (fork [(i+1) mod 5]);
        eat();
        signal (fork [(i+1) mod 5]);
        signal (fork[i]);
        signal (room);
    }
}
void main()
{
    parbegin (philosopher (0), philosopher (1), philosopher (2),
              philosopher (3), philosopher (4));
}

```

(Fig. 6.13 [Stal06])
(Alg. 6.11 [BenA06])

Trivial Solution #2

- No deadlock, no starvation
- Waiting when resources are available – which scenario? – not good

13.11.2008

Copyright Teemu Kerola 2008

21

Algorithm AS : Dining philosophers (good solution)

semaphore array [0..4] fork ← [1,1,1,1,1]

loop forever

- p1: think
 p2: wait(fork[i])
 p3: wait(fork[i+1])
 p4: eat
 p5: signal(fork[i])
 p6: signal(fork[i+1])

philosopher 4

- loop forever
 p1: think
 p2: wait(fork[0])
 p3: wait(fork[4])
 p4: eat
 p5: signal(fork[0])
 p6: signal(fork[4])

Even numbered philosophers?
 or
 This way with 50% chance?
 or
 This way with 20% chance?
 Etc. etc.

- No deadlock, no starvation
- No extra blocking
- Asymmetric solution – not so nice...
 - All processes should execute the same code
- Simple primitives, must be used properly

13.11.2008

Copyright Teemu Kerola 2008

22

```

void semaphore_server( ) {
    message m;
    int result;
    /* Initialize the semaphore server. */
    initialize( );
    /* Main loop of server. Get work and process it. */
    while(TRUE) {
        /* Block and wait until a request message arrives. */
        ipc_receive(&m);
        /* Caller is now blocked. Dispatch based on message type. */
        switch(m.m_type) {
            case UP:    result = do_up(&m);      break;
            case DOWN: result = do_down(&m);     break;
            default:   result = EINVAL;
        }
        /* Send the reply, unless the caller must be blocked. */
        if (result != EDONTREPLY) {
            m.m_type = result;
            ipc_reply(m.m_source, &m);
        }
    }
}

```

<http://www.usenix.org/publications/login/2006-04/openpdfs/herder.pdf>

13.11.2008

Copyright Teemu Kerola 2008

Minix Semaphore

23

Minix Semaphore P

```

int do_down(message *m_ptr) {
    /* Resource available. Decrement semaphore and reply. */
    if (s > 0) {
        s = s - 1;           /* take a resource */
        return(OK);          /* let the caller continue */
    }
    /* Resource taken. Enqueue and block the caller. */
    enqueue(m_ptr->m_source); /* add process to queue */
    return(EDONTREPLY);       /* do not reply in order to block the caller */
}

```

Suspend in message queue!

13.11.2008

Copyright Teemu Kerola 2008

24

Minix Semaphore V

Mutex?

```
int do_up(message *m_ptr) {
    message m; /* place to construct reply message */
    /* Add resource, and return OK to let caller continue. */
    s = s + 1; /* add a resource */

    /* Check if there are processes blocked on the semaphore. */
    if (queue_size() > 0) { /* are any processes blocked? */
        m.m_type = OK;
        m.m_source = dequeue(); /* remove process from queue */
        s = s - 1; /* process takes a resource */
        ipc_reply(m.m_source, m); /* reply to unblock the process */
    }
    return(OK); /* let the caller continue */
}
```

13.11.2008

Copyright Teemu Kerola 2008

25

Semaphores in Linux

<http://fxr.watson.org/fxr/source/include/asm-sh/semaphore.h?v=linux-2.4.22>

- semaphore.h
- Low level process/thread control
- In assembly language, in OS kernel
- struct semaphore {


```
atomic_t count;
int sleepers;
wait_queue_head_t wait;
```

}
- sema_init(s, val)
- init_MUTEX(s), init_MUTEX_LOCKED(s)
- down(s), int down_interruptible(s), int down_trylock(s)
- up(s)

13.11.2008

Copyright Teemu Kerola 2008

26

Semaphores in BACI with C--

- Weak semaphore
 - S.list is a set, not a queue
 - Awakened process chosen in random
- Counting semaphore: *semaphore count;*
- Binary semaphore: *binarysem mutex;*
- Operations
 - *Initialize (count, 0);*
 - *P()* and *V()*
 - Also *wait()* and *signal()* in addition to *P()* and *V()*
 - Value can be used directly: *n = count;* *cout count;*

↑ ↑
current value of semaphore count

13.11.2008

Copyright Teemu Kerola 2008

27

```

semaphore count;      // a "general" semaphore
binarysem output;    // a binary (0 or 1) semaphore for unscrambling output
main()
{
    initialsem(count,0);
    initialsem(output,1);
    cobegin {
        decrement(); increment();
    }
} // main

void increment()
{
    p(output);          // obtain exclusive access to standard output
    cout << "before v(count) value of count is " << count << endl;
    v(output);
    v(count);           // increment the semaphore
} // increment

void decrement()
{
    p(output);          // obtain exclusive access to standard output
    cout << "before p(count) value of count is " << count << endl;
    v(output);
    p(count);           // decrement the semaphore (or stop -- see manual text)
} // decrement

```

C- - Semaphore Example *semexample.cm*

(BACI C - User's Guide)

13.11.2008

Copyright Teemu Kerola 2008

28

C- - Semaphore Example

- 3 possible outcomes

– how? Executing PCODE ...
 before v(count) value of count is 0
 before p(count) value of count is 1

– how? Executing PCODE ...
 before p(count) value of count is 0
 before v(count) value of count is 0

– how? Executing PCODE ...
 before v(count) value of count is 0
 before p(count) value of count is 0

- Why no other possible outcome?

(BACI C- - User's Guide)

13.11.2008

Copyright Teemu Kerola 2008

29

Semaphores in Java

- Class *Semaphore* in package *java.util.concurrent*
<http://java.sun.com/j2se/1.5.0/docs/api/java/util/concurrent/Semaphore.html>
- S.value is S.permits in Java
 - Permit value can be positive and negative
- Permits can be initialized to negative numbers
- Semaphore type
 - fair (= strong) & nonfair (\approx busy-wait ??), default
- Wait(S):


```
try {
    s.acquire();
}
catch (InterruptedException e) {}
```
- Signal(S): s.release();
- Many other features

13.11.2008

Copyright Teemu Kerola 2008

30

Java Example

- Simple Java-solution with semaphore

```
vera: javac Plusminus_sem.java  
vera: java Plusminus_sem
```

http://www.cs.helsinki.fi/u/kerola/rio/Java/examples/Plusminus_sem.java

- Still fairly complex
 - Not as streamlined as P() and V()
- How does it *really* work?
 - Busy wait or suspended wait?
 - Fair queueing?
 - Overhead when no competition for CS?

13.11.2008

Copyright Teemu Kerola 2008

31

Semaphore Summary

- Most important synchronization primitive
 - Implementation needs OS assistance
- Can do anything
 - Just like assembly language coding...
- Many variants
 - Counting, binary, split, neg. values, mutex
- Programming language interfaces vary

13.11.2008

Copyright Teemu Kerola 2008

32