Lecture 3
Capacity Planning Process

Models
Parameters
Workload Characterization
Clustering
Workload Forecasting

Capacity Planning Process

- How is it used?
  - fig. 2.1 [Men 94]
- Overall methodology
  - fig. 2.3 [Men 94]

System Model

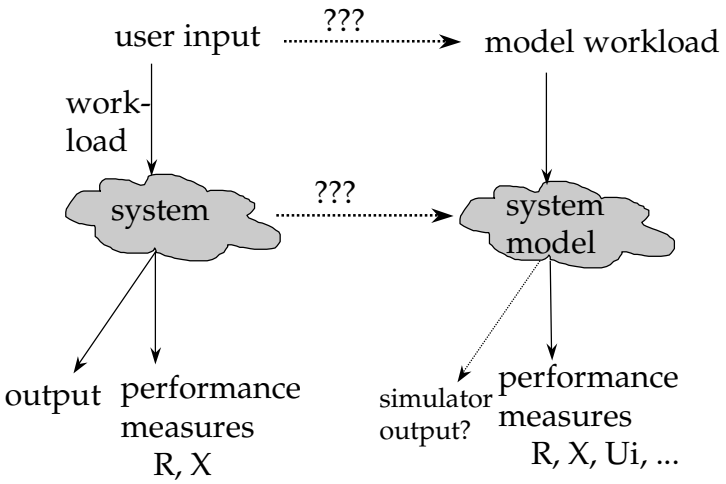

11.3.2002 Copyright Teemu Kerola 2002 3

Building System Model

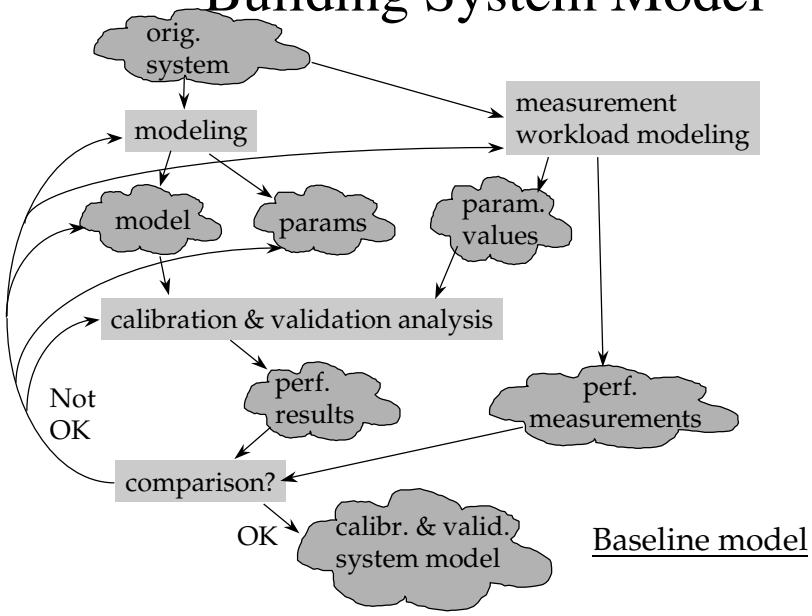

11.3.2002 Copyright Teemu Kerola 2002 4

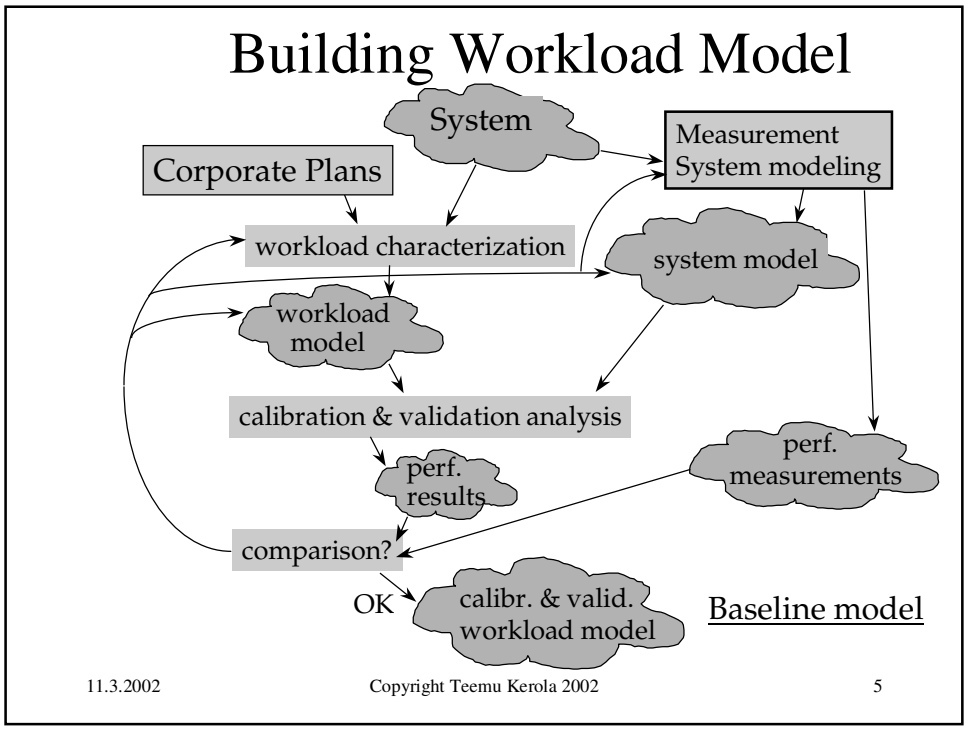
Building Workload Model
System
Measurement
System modeling
Corporate Plans
workload characterization
system model
workload
model
calibration & validation analysis
perf.
results
perf.
measurements
comparison?
OK
calibr. & valid.
workload model
Baseline model
11.3.2002
Copyright Teemu Kerola 2002
5

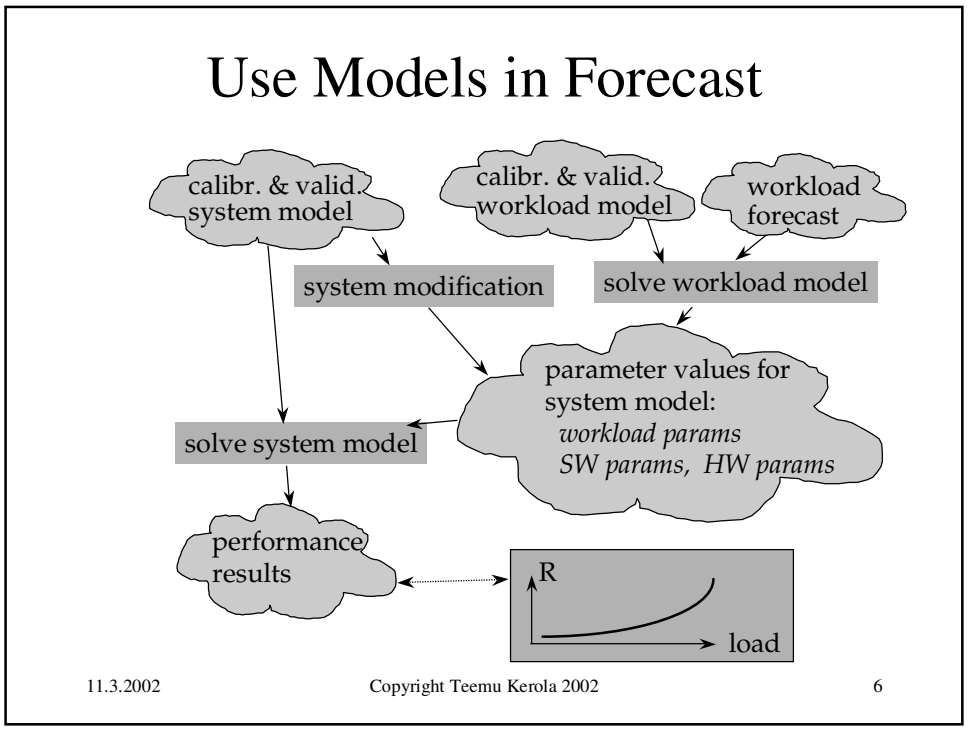
Use Models in Forecast
calibr. & valid.
system model
calibr. & valid.
workload model
workload
forecast
system modification
solve workload model
parameter values for
system model:
workload params
SW params, HW params
solve system model
performance
results
R
load
11.3.2002
Copyright Teemu Kerola 2002
6

Estimating Parameters (5)

- CPU time for one Query?
  - usually routines A, B and C invoked
  - total nr of instructions executed in average: 2000
  - architecture speed: 2.3 clock cycles per instr.
  - 4600 clock cycles, 10 MHz cycle time, 4600/10000 ms = 0.46 ms
- Faster CPU? 15 MHz => 0.31 ms
- Better compiler? 1000 instructions => 0.23 ms
- New disk driver? new architecture?
- What if big variance in nr of instructions executed?
  - new job class? more details....

Estimating Parameters (7)

- CPU time for one Query?
- generate only Queries for 1 hr
  - disk completely utilized, no good data
- generate 10000 queries at 50 ms intervals
  - disk no a problem now?
- average CPU utilization 10.2%, time 80 s,
- CPU util when no Queries present: 4.5%
  - network, other work?
- Util for Queries: 5.7%, cpu time 5.7% x 80 s = 4.56 s
- cpu time per Query: 4.56 s/ 10000 = 0.46 ms

What is Hard in Modeling?

- Need to understand <u>whole system and environment</u> before modeling
- Computing environment
  - resources, capacities
  - service requirements
- Device configuration
- Own SW
- Workload

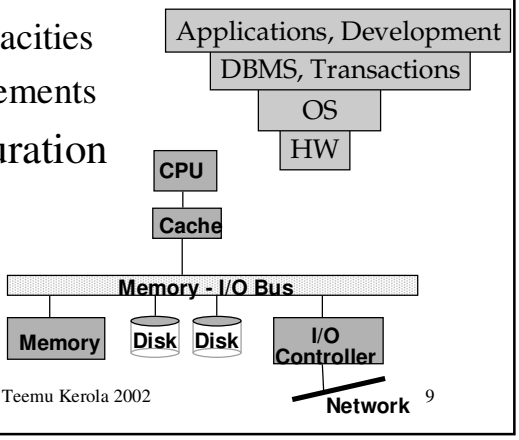

More Details in Model?

- Get more useful information
- System model becomes more complex
- Have more parameters; need to estimate them all
- Workload model becomes more complex
- Model solution becomes more complex
- E.g., if system load is high and transactions must queue for free memory partitions, then one should include memory in the model

Less Details

- Might not get enough useful information
- May leave out something really important
- E.g., disk transaction time may depend on
  - I/O channels, queues for heads of SCSI strings
  - device controllers, disk caches,
  - file access protocol, rotation speed
  - etc etc
- May use average service demand $D_{class,disk}$ if not interested in where the time is spent

Performance Prediction Methods

- Rules of Thumb
- Trend Analysis
- Operational Analysis
- Performance Models
  - analytical, simulation
- Benchmarks
  - best one is your own

Job Classes or Transaction Classes

- Workload may have different classes of transactions (jobs)
- Complicates model and parameter estimation
- Complicates solutions and use
- Gives more usable information
- Can aggregate some classes to simplify model

 Copyright Teemu Kerola 2002

Priorities

- Job classes may have priorities at some resources
  - CPU
- Priorities may be dynamically changing
- Difficult to model well
- Complicates solutions

 Copyright Teemu Kerola 2002

Capacity

- What is capacity?
- Theoretical capacity
  - fig. 2.5 [Men 94]
  - pop N = Resp. Time * Throughput
  - E.g., $0.6 = 0.2 \frac{\text{sec}}{transaction} \times 5 \frac{transactions}{\text{sec}}$

open system?
flow out (X, throughput)
= flow in

- Effective Capacity
  - when some defined constraint is reached

How to Compare Different Systems to Each Other?

- Time, throughput
- Benchmarks
  - standard (Whetstone, Linpack, …)
  - own
- MIPS
- SPECmark
- TPC - Transaction Processing Council

When is Load Measured?

- Peak load
  - fig. 2.7 [Men 94]

 Copyright Teemu Kerola 2002

What do you Measure?

- Performance
  - CPU utilization
- Other
  - availability
  - reliability
  - cost

 Copyright Teemu Kerola 2002

Requirements

- Something that must be met, or system fails
  - response time (e.g., less than 1 sec.)
  - throughput (e.g., at least 650 tps)
- MTTF - Mean Time To Fail
  - fig. 2.8 [Men94]

$$MTTF = \frac{48+72}{2}$$

- Availability
  - fig. 2.8

$$Availability = \frac{161}{168} = 95.8\%$$

Performance Goals

- Throughput X > 30 tps
- Response time R < 2 sec
  for 90% of the transactions
- Aver. resp. time for trivial transactions
  - R_{triv} < 1 sec
  - T_{CPU} < 5 msec, max 5 I/O's

Performance Goals (contd)

- Availability > 98% (monthly?)
- command response time
  - local commands: < 0.5 sec
  - remote commands: < 1.5 sec
- MTTF > 10000 hours
- What system?
  - PC? Bank? Nuclear Power Plan? Airport control system?
  - real time? hard real time?

 Copyright Teemu Kerola 2002

How to Characterize Workload?

- Example: mail Teemu.Kerola < aa.txt



- Basic components: 12 jobs
- Functional characteristics
  - software components?
  - mail? name server? file server? network server?
- Resource characteristics
  - CPU time? I/O time? (per disk?)
  - memory usage?

 Copyright Teemu Kerola 2002

Workload Characterization

- Input, output:
  - Fig 2.10
- Representativeness
  - Fig. 2.11

 Copyright Teemu Kerola 2002

Mail Example

- 12 mail commands
- Resource usage
  - Tbl 2.1 [Men 94]
- Simple (single class) characterization
  - Tbl 2.2
- More complex characterization
  - cluster jobs into 2 classes based on response time
  - Tbl 2.3
- Input rate (λ)? Think time (Z)?
  - Fig 2.12





 Copyright Teemu Kerola 2002

Workloads

(koetinkuormat)

- Real
- Synthetic
  - use part of real workload?
- Artificial
  - executable, not executable?
- Hybrid
- Kernel
- Non-executable
  - some abstraction of real workload
  - input for models
  - e.g., *average* service demand

File Server Load

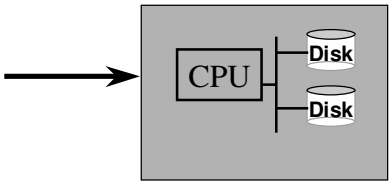

- Request distribution?
  - arrival rate? interarrival times? per class?
- File access probabilities?
- File access file size distribution?
- Read/write distribution?

10 trans/sec

60% disk-1

10% at most 1 sector, ...

10% are writes

Workload Partitioning

- Based on some attribute
  - resource usage, application,
  - geographic orientation, functional attribute
  - etc etc etc
- Tbls 2.4 - 2.10 [Men 94]

 Copyright Teemu Kerola 2002

Clustering

- How to determine that one should use multiple classes?
- How to determine what jobs belong to which class?
- Cluster analysis (statistics)
  - fig. 2.13 [Men 94]

 Copyright Teemu Kerola 2002

Clustering Metrics

- How to decide if two jobs belong to the same class?
  - Tbl 2.11 [Men 94]
- Euclidean metric

$$d_{i,j} = \sqrt{\sum_{n=1}^{K} (D_{in} - D_{jn})^2}$$

  - geographical distance between two jobs (i, j) based on K attributes (n)
  - see p. 54 [Men 94] Euclidean measures
  - used scale may affect result - beware!
  - Does B&C make up a class? or A&B?

11.3.2002 Copyright Teemu Kerola 2002 29

Normalized Euclidean Metric

- Z score for each job *i* for each attribute n

$$Z_{in} = \frac{D_{in} - \overline{D}_n}{std.dev(D_{jn})}$$

- Distance measured as Euclidean distance between (normalized) Z scores (instead of raw measurements)
- See measures on p. 55 [Men 94]

for attribute n over all jobs j

- Another method to "normalize": use logarithm of the values instead of orig values
  - good when magnitude varies a lot

11.3.2002 Copyright Teemu Kerola 2002 30

Clustering Algorithm

- k-means algorithm
  - Fig. 2.15 [Men 94]
  - Example, Tbl. 2.12-18 [Men 94]

 Copyright Teemu Kerola 2002

Workload Forecasting

- What is the value of some model parameter 5 months from now? 1 year from now?
- Must have this info to use models for forecasting

 Copyright Teemu Kerola 2002

System Model Parameters

- Workload model
  - use workload estimate to obtain system model parameter estimates
- Workload
  - Key Value Indicator
  - Natural Business Unit
  - Forecasting Business Unit
- System Model Parameters
  - Data base request arrival rate & distribution
  - Think time for interactive users

Forecasting Techniques

- Trends
  - Fig. 2.16 [Men 94]
- Moving Average
  - Tbl. 2.21
- Exponential Smoothing
  - feedback loop from most recent forecast error

$$f_{t+1} = f_t + \alpha(y_t - f_t)$$

  - Tbl. 2.22, Fig. 2.17

Forecasting Techniques (contd)

- Regression Models
  - estimate is dependent on other variables
    - estimated variable (e.g., y) difficult to measure directly
    - dependent variables (e.g., x) easy to measure

    $y = a + bx$
  - make a small set of measurements for dependent variables (x) and estimate (y)
  - select factors (e.g., a & b) so that errors in estimate are smallest
  - use same factors for new dep. variable values
  - method of least squares
    - Tbl 2.23 [Men 94]

 Copyright Teemu Kerola 2002

Performance Prediction

- Output: forecasts for different scenarios
  - Fig. 2.18 [Men 94]
- Different techniques
  - low vs. high complexity and cost
  - Fig. 2.19
  - Fig. 2.20

 Copyright Teemu Kerola 2002

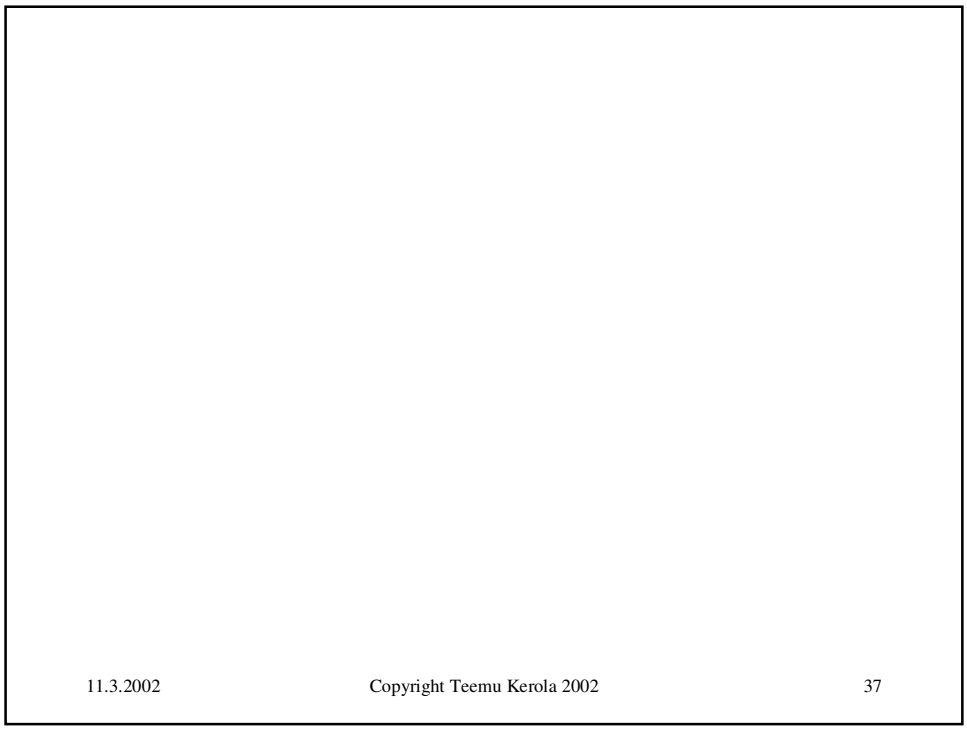
11.3.2002
Copyright Teemu Kerola 2002
37